




# Details of Hub & Spigot for SV

## TECHNICAL INFORMATION

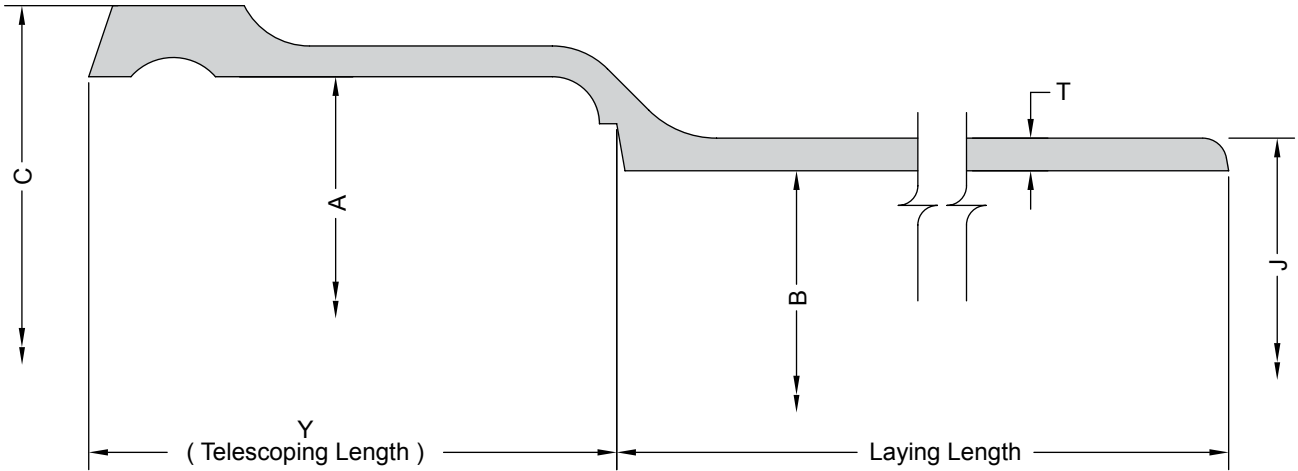

DETAILS OF HUB & SPIGOT FOR SV\*

NOM. SIZE	INSIDE DIAMETER HUB		INSIDE DIAMETER BARREL		C	OUTSIDE DIA. OF BARREL		THICKNESS OF BARREL		TELESCOPING LENGTH	
	A		B			J		T-NOM	T-MIN	Y	
2	2.94	± 0.06	1.96	± 0.09	3.62	2.30	± 0.09	0.17	0.14	2.50	± 0.06
3	3.94	+ 0.09 - 0.06	2.96	± 0.09	4.68	3.30	± 0.09	0.17	0.14	2.75	± 0.06
4	4.94	+ 0.09 - 0.06	3.94	± 0.09	5.68	4.30	± 0.09	0.18	0.15	3.00	± 0.06
5	5.94	+ 0.09 - 0.06	4.94	± 0.09	6.68	5.30	± 0.09	0.18	0.15	3.00	± 0.06
6	6.94	+ 0.09 - 0.06	5.94	± 0.09	7.68	6.30	± 0.09	0.18	0.15	3.00	± 0.06
8	9.25	± 0.13	7.94	± 0.13	10.13	8.38	± 0.13	0.23	0.17	3.50	± 0.13
10	11.38	± 0.13	9.94	± 0.13	12.44	10.50	± 0.13	0.28	0.22	3.50	± 0.13
12	13.50	± 0.13	11.94	± 0.19	14.56	12.50	± 0.19	0.28	0.22	4.25	± 0.19
15	16.95	± 0.13	15.16	± 0.19	18.11	15.88	± 0.19	0.36	0.30	4.25	± 0.19

Note: All dimensions and tolerances are from ASTM A-74.

\*All dimensions in inches except where indicated.

REV: 10.01

\*REGISTERED TRADEMARK OF STAR PIPE PRODUCTS

STAR PIPE PRODUCTS  
 PLUMBING DIVISION TOLL FREE 1-877-909-7827 FAX 866-868-7827  
 www.starpipeproducts.com



STAR® PIPE PRODUCTS