



Tandem Stargrip® series 3000T

For High Pressure DI Pipe to MJ Fitting Applications



The Tandem Stargrip® series 3000T includes two (2) Stargrip® series 3000 products.

SUBMITTAL INFORMATION

PROJECT NAME:

ENGINEER:

CONTRACTOR:

SPEC. SECTION:



FEATURES & ADVANTAGES

- The Wedge Assembly is designed with a Break-Off Torque Control Nut that will only break off in one direction, ensuring proper installation.
- The Stargrip® offers a full 5° deflection through 12" size, 3° on 14"-24", 2° on 30"-36" and 1° on 42"-48".
- Minimum safety factor of 2:1
- The Wedge Assembly is designed to fit specific pipe sizes and is field repairable.
- No special tools are required for installation of the Stargrip®.
- Stargrip® may also be used on steel pipe* up to 12" (***transition gasket required on 12" and under**). For 14" and larger steel applications, contact Star Pipe.

MATERIAL SPECIFICATIONS:

- Gland: Ductile Iron per ASTM A536, Grade 65-45-12
- Wedges: Ductile Iron per ASTM A536, Grade 65-45-12 heat treated to a minimum of 370 BHN
 - ♦ Wedge Finish: Fluorocarbon Star-Blue resin bonded coating, thermally cured dry lubricant

GLAND FINISH OPTIONS (Please check one):

Standard: Star Multi-Coat™ 2-phase coating process consisting of a zinc rich primer base coat and an alkyd enamel top coating

Optional: Starbond™ TGIC polyester powder coating applied by an electrostatic spray process

Optional: Other (specify) _____

HARDWARE OPTIONS (Please check one):

Standard: T-bolts and bolt rods are high strength low alloy steel manufactured in accordance with ANSI/AWWA C111/A21.11-00

Optional: T-bolts, bolt rods, and nuts alloy SS 304 per ASTM F593

Optional: T-bolts, bolt rods, and nuts alloy SS 316 per ASTM F593

Optional: T-bolts, bolt rods and nuts Fluoropolymer Star-Blue coated high strength low alloy steel manufactured in accordance with ANSI/AWWA C111/A21.11-00

COUNTRY OF ORIGIN OPTION (Please check one):

Import

Domestic

STAR® PIPE PRODUCTS






Tandem Stargrip® series 3000T

For High Pressure DI Pipe to MJ Fitting Applications

TECHNICAL INFORMATION

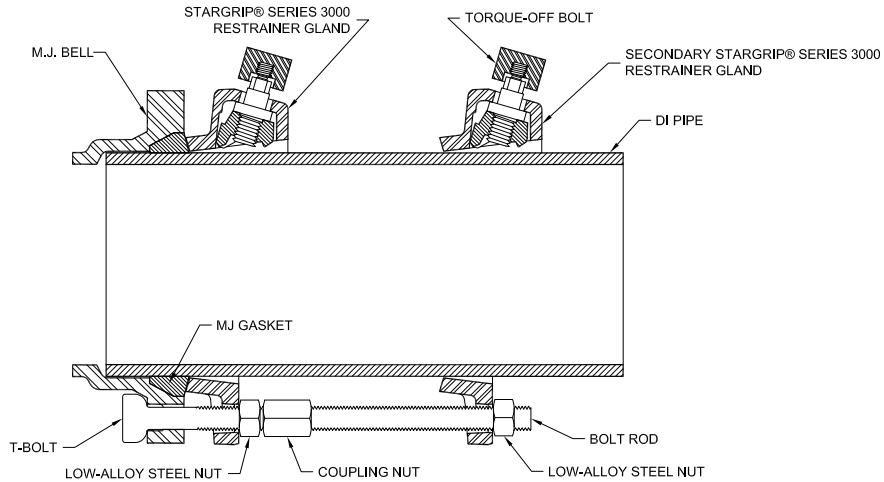

DATA FOR HIGH PRESSURE STARGRIP® ASSEMBLY

Please check sizes:

NOM. SIZE	DI PIPE OD	PRESSURE RATING (PSI)	BOLT ROD SIZE	T-BOLT SIZE	T-BOLT TORQUE (FT-LBS)	COUPLING NUT-GRADE 5 STEEL
14	15.30	700	3/4 - 10 x 12	3/4 - 10 x 5	90-110	3/4 - 10 x 2 1/4
16	17.40	700	3/4 - 10 x 12	3/4 - 10 x 5	90-110	3/4 - 10 x 2 1/4
18	19.50	500	3/4 - 10 x 12	3/4 - 10 x 5	120-140	3/4 - 10 x 2 1/4
20	21.60	500	3/4 - 10 x 12	3/4 - 10 x 5 1/2	120-140	3/4 - 10 x 2 1/4
24	25.80	350	3/4 - 10 x 12	3/4 - 10 x 5 1/2	120-140	3/4 - 10 x 2 1/4
30	32.00	350	1 - 8 x 12	1 - 8 x 6 1/2	120-140	1 - 8 x 2 1/2
36	38.30	350	1 - 8 x 12	1 - 8 x 7 1/4	120-140	1 - 8 x 2 1/2
42	44.50	350	1 1/4 - 7 x 12	1/4 x 8 1/2	120-150	1 1/4 - 7 x 3 3/4
48	50.80	350	1 1/4 - 7 x 12	1 1/4 x 8 1/2	120-150	1 1/4 - 7 x 3 3/4

*All dimensions in inches except where indicated.

