




Pipe Restrainers series 1200R

1200R Restrainer only
for 14"-24" IPEX / Blue Brute® PVC Pressure Fittings

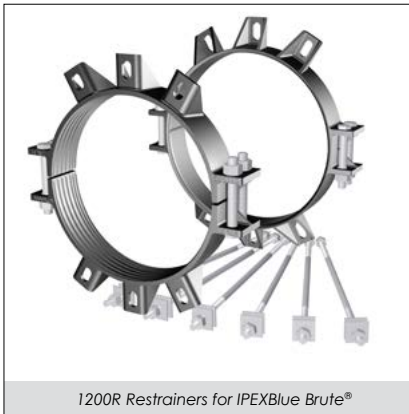

1200R Restrainers for IPEX Blue Brute®

SUBMITTAL INFORMATION

PROJECT NAME:

ENGINEER:


CONTRACTOR:

SPEC. SECTION:



FEATURES & ADVANTAGES

- 360° contact, no pipe distortion or point loading
- Restrainers work with IPEX Blue Brute® PVC Pressure Fittings and C905 PVC Pressure Pipe.
- All restrainers are machined to exact tolerances.
- Rated at the full rated pressure of IPEX PVC Pipe fitting or the C905 pipe being installed, whichever is less with a 2:1 Safety Factor
- Supports wall of pipe with 360 degree contact
- Can be installed outside the trench, to ease installation
- T-Bolts/Rods/Hex Nuts: Low Alloy Steel Per ANSI/AWWA C111/A21.11
- Clamping Bolts: SAE J429 Grade5



1200R on PVC Fitting

* Blue Brute® is a trademark of IPEX Branding, Inc.

MATERIAL SPECIFICATIONS:

- Gland: Ductile Iron per ASTM A536, Grade 65-45-12

GLAND FINISH OPTIONS (Please check one):

- Standard: alkyd enamel coating
- Optional: Starbond™ TGIC polyester powder coating applied by an electrostatic spray process
- Optional: Other (specify) _____

HARDWARE OPTIONS (Please check):

- Standard: Bolt rods and nuts are high strength low alloy steel manufactured in accordance with ANSI/AWWA C111/A21.11-00
- Optional: Bolt rods and nuts alloy SS 304 per ASTM F593
- Optional: Bolt rods and nuts alloy SS 316 per ASTM F593
- Optional: Bolt rods and nuts Fluoropolymer Star-Blue coated high strength low alloy steel manufactured in accordance with ANSI/AWWA C111/A21.11-00



STAR® PIPE PRODUCTS




Pipe Restrainers series 1200R

1200R Restrainer only
for 14"-24" IPEX / Blue Brute® PVC Pressure Fittings

TECHNICAL INFORMATION

PIPE SIZE (IN)	MINIMUM TORQUE (FT-LBS)
14 - 24	130

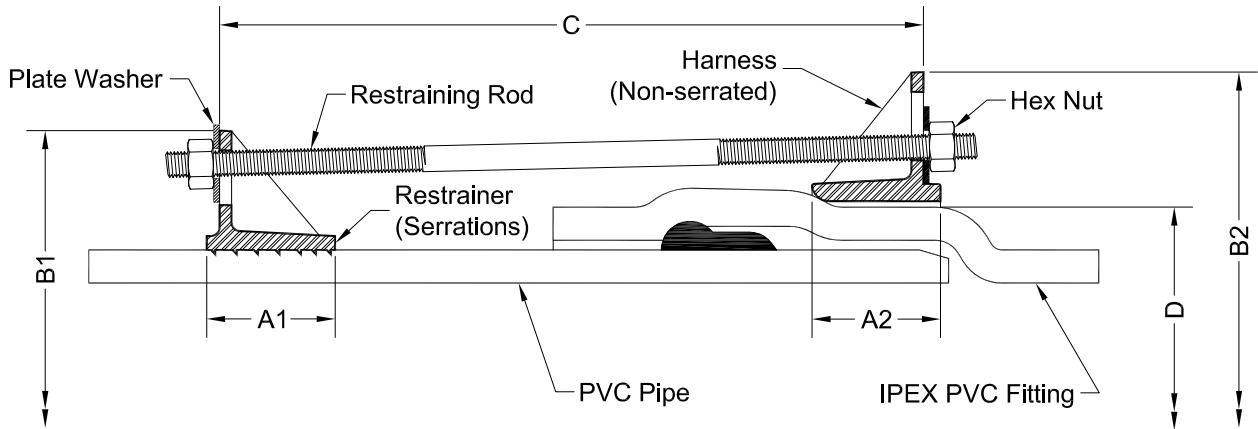

NOM. SIZE ¹	PVC PIPE WITH DUCTILE IRON PIPE O.D. STYLE 1200C	PVC FITTING BELL OD "D"		A1	A2	B1 APPROX.	B2 APPROX.	C MAX.	RESTRAINT BOLTS/RODS		CLAMPING BOLTS		APPROX. WT. (LBS)
		O.D.	MIN.						MAX.	QTY	SIZE	QTY	
14	15.30	17.28	17.73	4.00	3.75	22.68	25.27	21	6	3/4 x 24	8	7/8 x 7**	130
16	17.40	19.64	20.17	3.75	3.75	24.65	27.71	27	6	3/4 x 30	8	7/8 x 6 1/2	123
18	19.50	22.25	22.50	4.25	4.00	26.65	30.04	27	8	3/4 x 30	8	7/8 x 6 1/2	150
20	21.60	25.00	25.25	5.00	5.00	28.88	32.79	27	8	3/4 x 30	8	1 1/8 x 8 1/2	220
24	25.80	30.00	30.25	5.00	5.00	33.98	37.93	33	12	3/4 x 36	8	1 1/2 x 8 1/2	290

Please check sizes:

*All dimensions in inches except where indicated.
** Clamping bolt size for harness is 7/8 x 6 1/2

STAR® PIPE PRODUCTS